

Installation Guide







Speedgun Pro


Dash Bracket Assembly




FITS: Speedgun Pro




PT# ai.951680A




Installation Materials

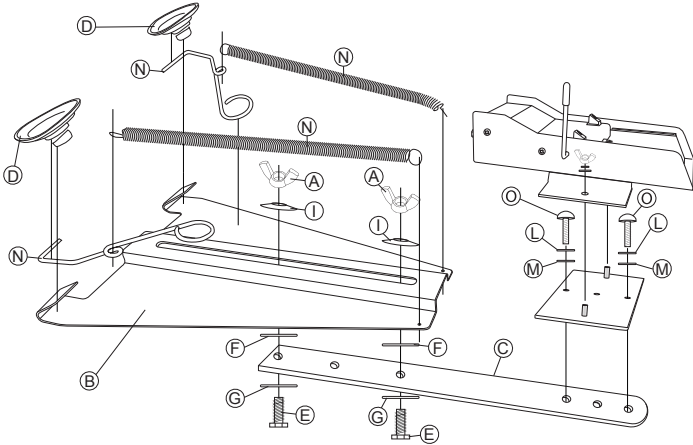903542	A QUANTITY 2	910114	B QUANTITY 1	910915	C QUANTITY 1	910123	D QUANTITY 2	908894	E QUANTITY 2	900024	F QUANTITY 2
											
Wing Nut 1/4-20		Suction Cup Bracket		Slide Dash Bracket		Suction Cup w/top Pilot		Hex Screw 1/4-20x.50		Nylon Washer	


ai.951680	
	
Speedgun Pro Bracket Assembly	

908340	G QUANTITY 2	620009	H QUANTITY 1	900025	I QUANTITY 2
					
Regular Plain Washer		Foam Scotch Pad		Disc Spring	

680004	J QUANTITY 1	680005	K QUANTITY 1	903353	L QUANTITY 2
					
Dual Lock		Dual Lock		Star Lock Washer #4	


408002	M QUANTITY 2	950292	N QUANTITY 2 ea.	804001	O QUANTITY 2 ea.
					
Regular Plain Washer #4		Spring & Hook Assembly		Screw 4-40 x .312	

1

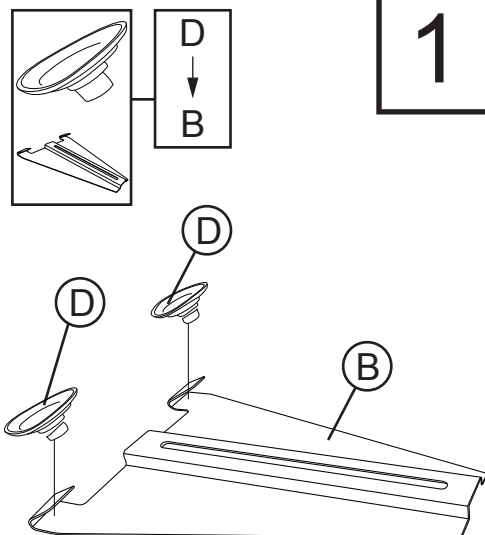


Fit the Suction Cup (D) into the insert of the Suction Cup Bracket (B) for both sides.

2

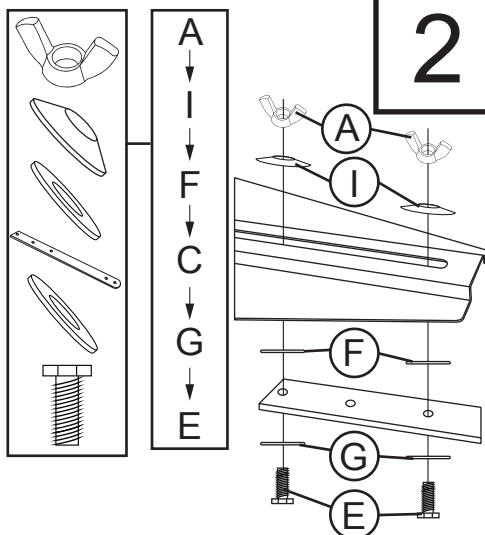


Using the Hex Screws (E) put a Regular Plain Washer (G) on the screw and fit through the holes of the Slide Dash Bracket (C). Separate the Slide Dash Bracket (C) from the Suction Cup Bracket (B) using a Nylon Washer (F). After joining the two brackets together, add a Spring Disc (I) and secure with a Wing Nut (A) on each screw.

3

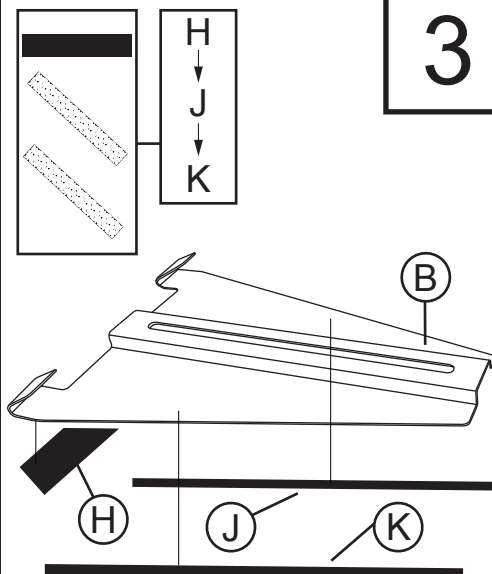


For extra stability stick the Dual Lock (J,K) to the bottom of the Suction Cup Bracket (B). The Foam Pad (H) can also be used to cushion the bracket from the dash.

4

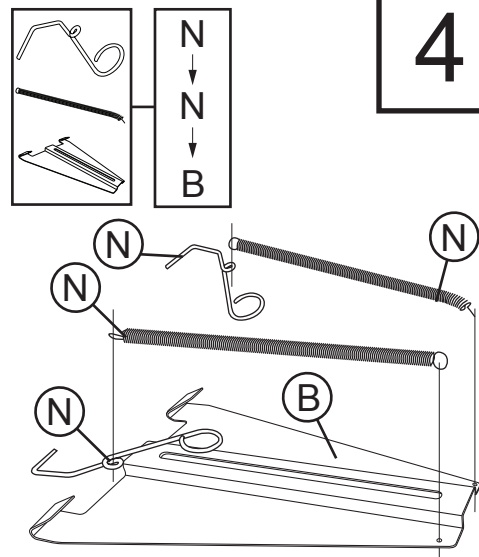


Take the Spring (N) and loop one end to the bottom of the Suction Cup Bracket (B). Put the open end of the Spring (N) inside the middle loop of the Hook (N). Using the straight end of the Hook (N) fit between the dash and the window. Do this for both sides.

5

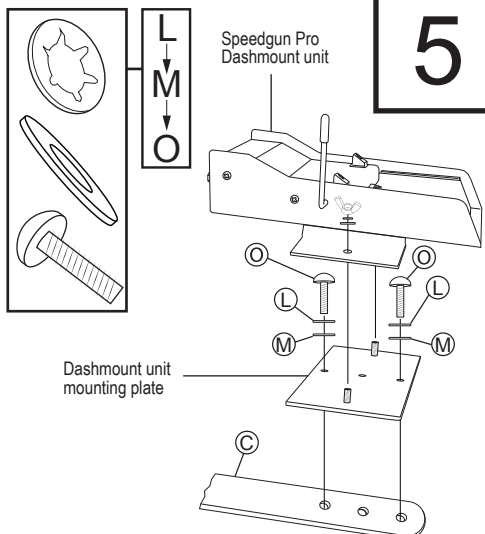


Remove 2 wingnuts and washers as shown. Use screws (O) and washers (L,M) to attach dashmount unit mounting plate to (C). Re-attach Speedgun Pro dashmount unit to attached mounting plate using provided wingnuts and washers.
*Note: Speedgun Pro Dashmount unit must be ordered separately from bracket assembly.

6

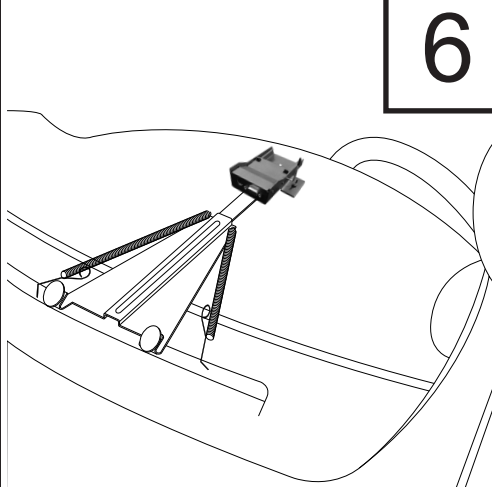


Put the finished bracket into the car on the dash. Be sure to secure the Suction Cups (D) to the window and then stabilize with the Dual Lock Strips (J,K), if you choose to use them. Mount the Speedgun Pro to the bracket and adjust the Slide Dash Bracket to fit. Tighten Wing Nuts (A).

7

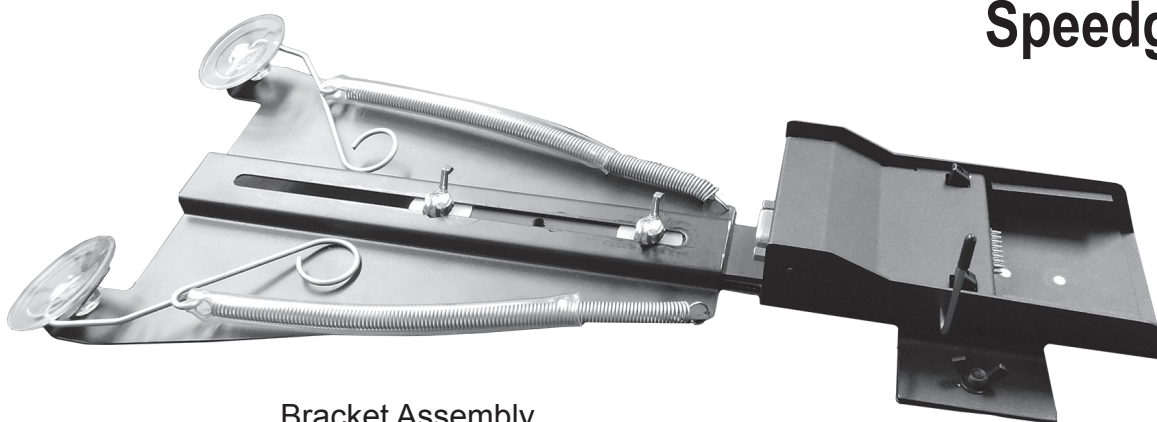

Bracket Assembly
Part# ai.951680

Speedgun Pro

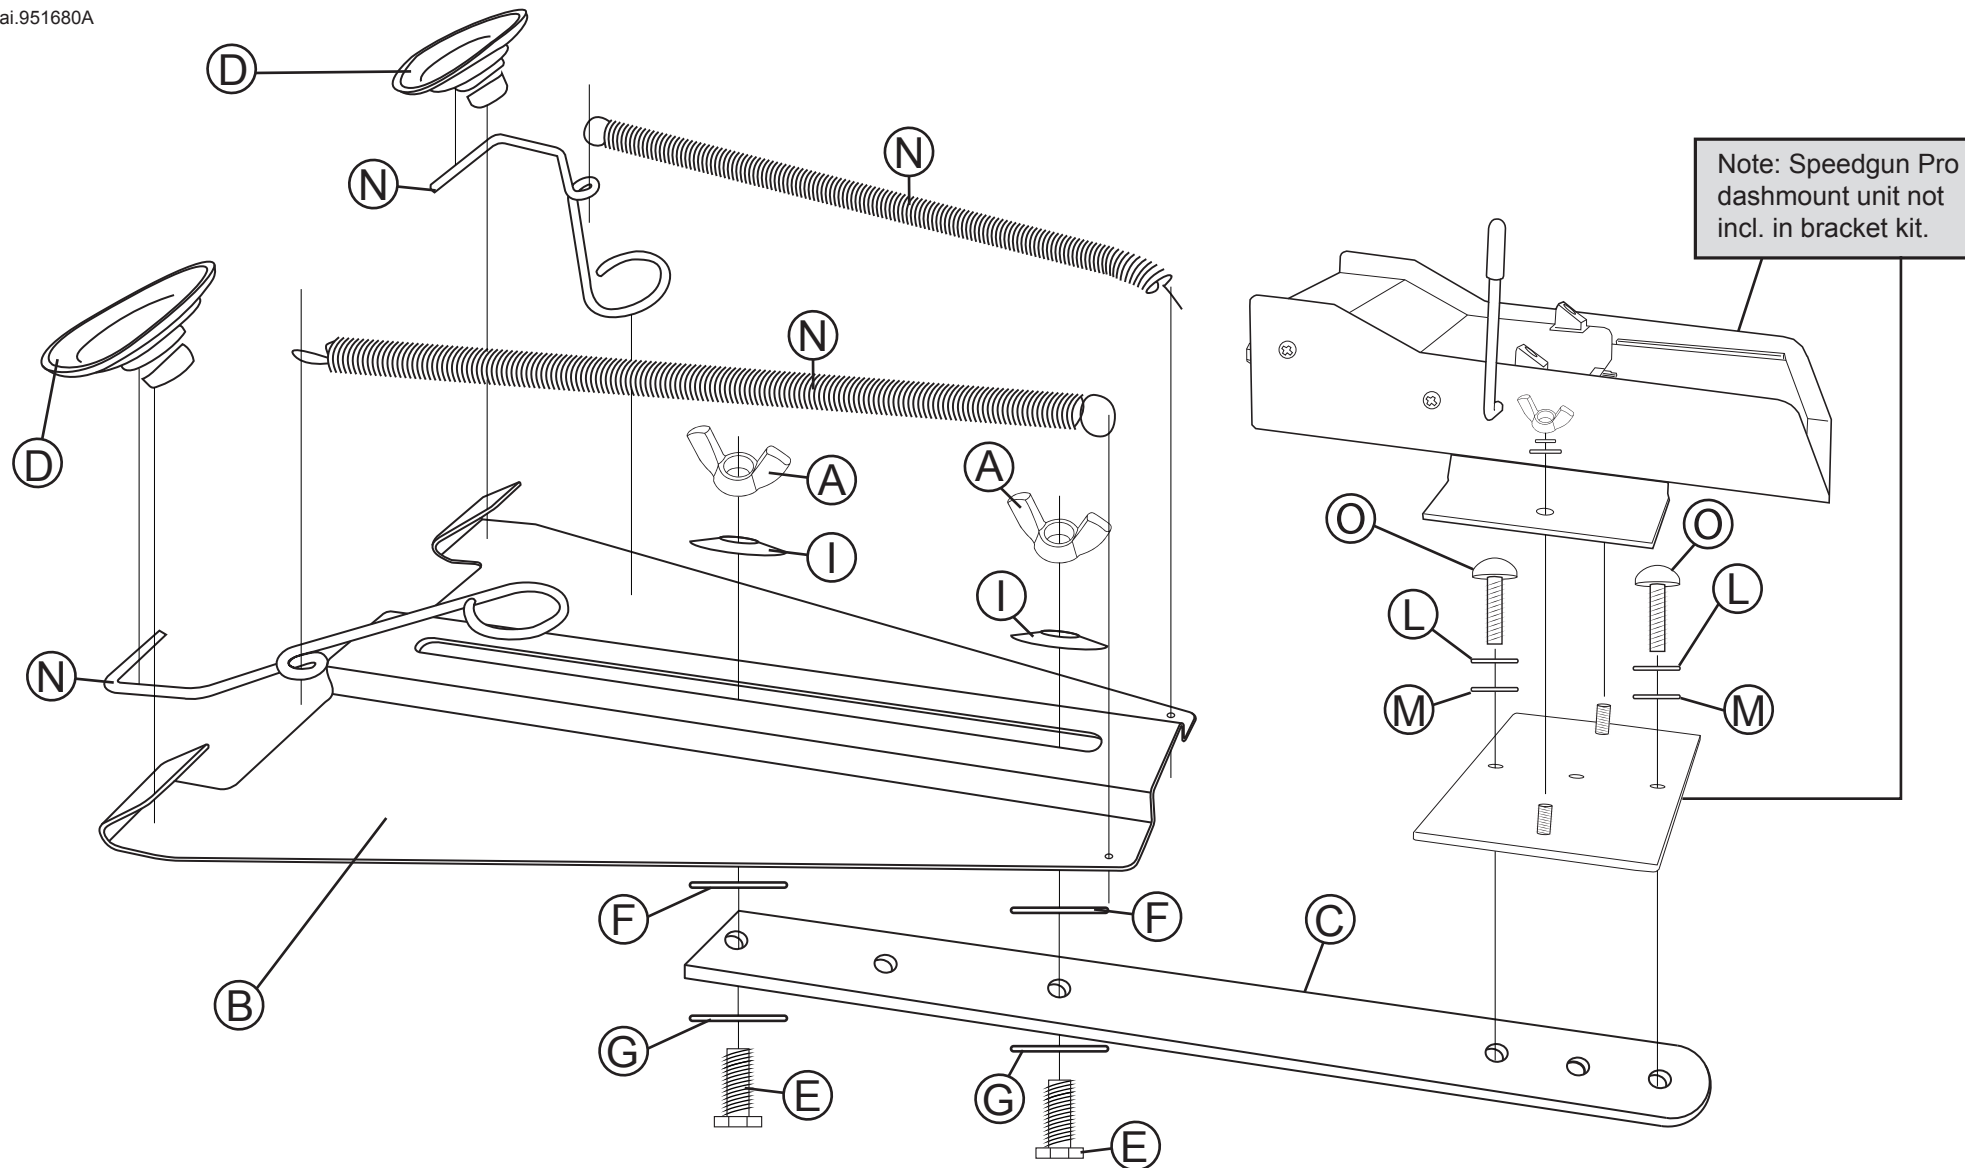

ITEM	QTY	PART #	DESCRIPTION
A	2	903542	Wing Nut 1/4-20
B	1	910114	Suction Cup Bracket
C	1	910915	Slide Dash Bracket
D	2	910123	Suction Cup w/top Pilot
E	2	908894	Hex Screw 1/4-20x.50
F	2	900024	Nylon Washer
G	2	908340	Regular Plain Washer
H	1	620009	Foam Scotch Pad
I	2	900025	Disc Spring

H, J, K
OPTIONAL PARTS

ITEM	QTY	PART #	DESCRIPTION
J	1	680004	Dual Lock
K	1	680005	Dual Lock
L	2	903353	Star Lock Washer #4
M	2	408002	Regular Plain Washer #4
N	2	950292	Spring & Hook Assembly
O	2	804001	Screw 4-40 x .312